



BANDFILE

GRIND, DEBURR, BLEND, CLEAN
POLISH, SURFACE, CONDITION**6101-6****DOUBLE
INSULATED**
WITH ON/OFF
PADDLE SWITCH**6101-6 BANDFILE FEATURES:**


- 5.5 Amp Motor
- 1/2" x 18" Contact Arm
- 180° Adjustable Head
- 3 Position Side Handle



Strap polishing using contact arm 48-08-0290.



Grind and deburr ends of metal stock.

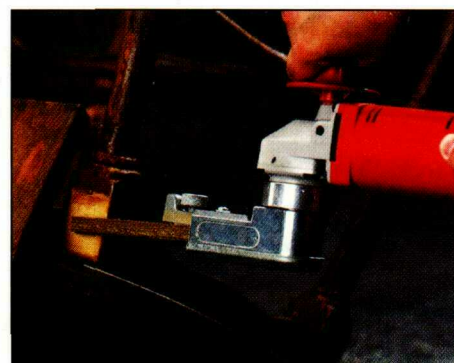

Effective in sanding hard to reach places on wood and other non-metallic surfaces.

ACCESSORIES

**MILWAUKEE BANDFILE BELTS**

Are made with premium, natural mineral abrasives adhered to heat resistant cloth backing for extended wear under the toughest conditions. They are ideal for grinding, deburring, sanding or polishing a wide variety of base materials including metal, wood, plastics, fiberglass and composites. Use non-woven conditioning belts to blend or polish and aluminum oxide belts where stock removal is desired.

1/2" BELT SELECTION

CATALOG NUMBER	SIZE	GRIT	DESCRIPTION	PKG. QTY.
49-93-8101	1/2" x 18"	Very Fine	Non-Woven Conditioning Belt	5
49-93-8103	1/2" x 18"	Medium	Non-Woven Conditioning Belt	5
49-93-8105	1/2" x 18"	Coarse	Non-Woven Conditioning Belt	5
49-93-8110	1/2" x 18"	Assortment	Non-Woven Conditioning Belt	5
49-92-8101	1/2" x 18"	Very Fine	Non-Woven Conditioning Belt	25
49-92-8103	1/2" x 18"	Medium	Non-Woven Conditioning Belt	25
49-92-8105	1/2" x 18"	Coarse	Non-Woven Conditioning Belt	25
49-93-8115	1/2" x 18"	60	Alum. Oxide Resin Cloth	10
49-93-8116	1/2" x 18"	80	Alum. Oxide Resin Cloth	10
49-93-8117	1/2" x 18"	120	Alum. Oxide Resin Cloth	10
49-93-8118	1/2" x 18"	180	Alum. Oxide Resin Cloth	10
49-93-8119	1/2" x 18"	240	Alum. Oxide Resin Cloth	10
49-93-8120	1/2" x 18"	Assortment	Alum. Oxide Resin Cloth	10
49-92-8115	1/2" x 18"	60	Alum. Oxide Resin Cloth	50
49-92-8116	1/2" x 18"	80	Alum. Oxide Resin Cloth	50
49-92-8117	1/2" x 18"	120	Alum. Oxide Resin Cloth	50
49-92-8118	1/2" x 18"	180	Alum. Oxide Resin Cloth	50
49-92-8119	1/2" x 18"	240	Alum. Oxide Resin Cloth	50

SPECIFICATIONS

CATALOG NUMBER	VOLTS AC	AMPS	SFPM	LENGTH (INS.)	NET WGT. (LBS.)	SHIP. WGT. (LBS.)
6101-6	120	5.5	2,300	18.5	6	7-3/4

STANDARD EQUIPMENT: FOR 6101-6 – Includes Side Handle, 1/2" Arm and Belt Assortment 49-93-8120.

OFFSET CONTACT ARM

48-08-0290 For finishing curved surfaces.

**3/4" CONTACT ARM**

48-08-0295 For finishing flat surfaces.

**3/4" BELT SELECTION FOR USE WITH CONTACT ARM 48-08-0295**

CATALOG NUMBER	SIZE	GRIT	DESCRIPTION	PKG. QTY.
49-93-8111	3/4" x 18"	Very Fine	Non-Woven Conditioning Belt	5
49-93-8112	3/4" x 18"	Medium	Non-Woven Conditioning Belt	5
49-93-8113	3/4" x 18"	Coarse	Non-Woven Conditioning Belt	5
49-93-8114	3/4" x 18"	Assortment	Non-Woven Conditioning Belt	5
49-92-8131	3/4" x 18"	Very Fine	Non-Woven Conditioning Belt	25
49-92-8132	3/4" x 18"	Medium	Non-Woven Conditioning Belt	25
49-92-8133	3/4" x 18"	Coarse	Non-Woven Conditioning Belt	25
49-93-8125	3/4" x 18"	60	Alum. Oxide Resin Cloth	10
49-93-8126	3/4" x 18"	80	Alum. Oxide Resin Cloth	10
49-93-8127	3/4" x 18"	120	Alum. Oxide Resin Cloth	10
49-93-8128	3/4" x 18"	180	Alum. Oxide Resin Cloth	10
49-93-8129	3/4" x 18"	240	Alum. Oxide Resin Cloth	10
49-93-8130	3/4" x 18"	Assortment	Alum. Oxide Resin Cloth	10
49-92-8125	3/4" x 18"	60	Alum. Oxide Resin Cloth	50
49-92-8126	3/4" x 18"	80	Alum. Oxide Resin Cloth	50
49-92-8127	3/4" x 18"	120	Alum. Oxide Resin Cloth	50
49-92-8128	3/4" x 18"	180	Alum. Oxide Resin Cloth	50
49-92-8129	3/4" x 18"	240	Alum. Oxide Resin Cloth	50

*Catalog Numbers noting a 25 or 50 count are packaged loose in a box. All others are in hangable tri-lingual sleeves.